



## DESCRIPTION

A single gang format, mains isolation key switch.

Provides a secure method for safe isolation of mains supply voltage to fire alarm control panels and mains powered accessories in accordance with BS5839.

## FEATURES

- Double pole key switch (both live and neutral isolated)
- Fuse only accessible by removing the cover
- Green LED to indicate mains supply at the output
- Fits standard 15mm single gang back box
- Integral 5 amp fuse (isolated when key is in the 'OFF' position)
- Uses standard fish key


## PRODUCT CODES

FAIS-R-B	Red switch complete with back box
----------	-----------------------------------

## INSTALLATION INSTRUCTIONS

The isolator switch may be surface or flush mounted using the provided back box. Standard, 15mm, single gang mounting boxes may also be used.

Holes for conduit, glands or mini trunking should be drilled as required. A 20mm rear access hole is provided plus BESA box fixing holes. Remove lid prior to drilling holes to avoid circuit damage.

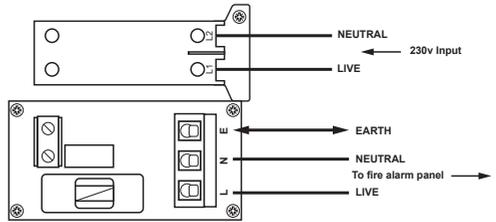

## TECHNICAL INFORMATION

OPERATING VOLTAGE	230v ac (harmonised)
CONTACT RATING	250v ac 4/8A
FUSE	5 amp, 20mm quick blow (F)
ENCLOSURE	ROHS compliant FR ABS
KEY TYPE	Standard electrical fish key

